





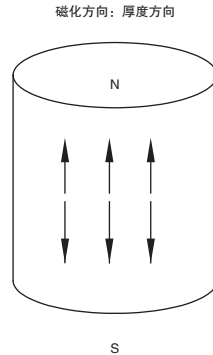

①代号	类型	④材质	⑤表面处理	最高工作温度
MTUP	标准型	钕磁铁	镀镍	80° C

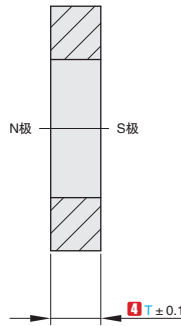

▲ 吸附力、表面磁通密度为参考值。

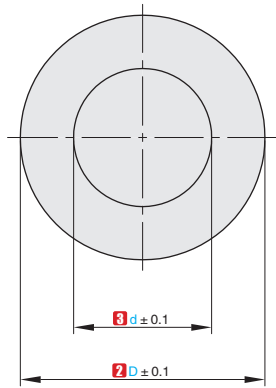

①代号 - ②D - ③d - ④T
 MTUP - D6 - d2 - T2

①代号	②D	③d	④T	吸附力(kgf)	表面磁通密度高斯(G)			
MTUP	6	2	2	0.6	2400~2800			
			3	0.8	3000~3400			
	8	3	4	1	0.5	1400~1800		
				2	0.8	2400~2800		
				3	1	3000~3400		
	10	3	4	5	6	1.5	3000~3800	
						1	0.7	1500~1900
						2	1.1	2400~2800
						3	1.2	3100~3600
	12	4	5	6	8	1.9	3400~3800	
						1	0.8	1300~1700
						2	1.4	2300~2700
	14	4	6	8	3	1.6	2700~3100	
						5	2.4	3400~3800
						1	0.9	1400~1800
	18	6	8	12	3	2	2400~2800	
						3	2.4	2700~3100
						5	3.7	3400~3800
	20	6	8	10	12	3	2700~3100	
						1	1.1	1100~1500
2						2.2	2000~2400	
3						3.4	2400~2800	
25	6	8	10	12	5	3400~3800		
					1	1.3	1100~1500	
					2	3.5	1900~2300	
					3	6	2400~2800	
30	6	8	10	12	5	3200~3600		
					5	10	2800~3200	