

悬臂销 法兰安装 挡圈型




大批量
订购
bulk order

■ 法兰安装 挡圈型



① 代号		[M] 材质	[S] 表面处理	[A] 附件 挡圈
圆型	对边切割型			
CSFBRA	CSFBCA	45#	四氧化三铁保护膜	弹簧钢
CSFERA	CSFECA		无电解镀锌	不锈钢
CSFNRA	CSFNCA	SUS304	-	

产品特点: 侧板螺母安装, 零件侧内螺纹紧固, 承载较高。

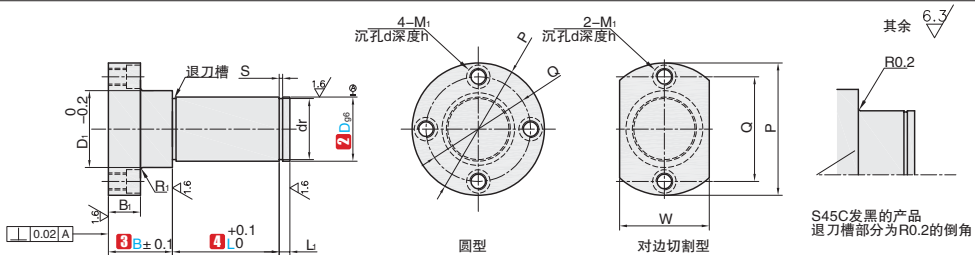

订购编号示例

① 代号	-	② No	-	③ B	-	④ L	-	⑤ 追加工代码
CSFBRA	-	20	-	B20	-	L20	-	GP

① 代号	② No	轴径		指定单位 1mm		D ₁	P	B ₁	M ₁ (粗牙)	d	h	Q	dr		S	L ₁	W						
		D	公差 g6	③ B	④ L								基准尺寸	容差									
(圆型) CSFBRA CSFERA CSFNRA	6	6	-0.004	12 ~ 60	5 ~ 100	8	26	10	M 4	6.5	3.5	17	5	+0.075 0	0.7	2	14						
	6A		-0.012				32					23					-						
	8	8	-0.005			10 ~ 150	10		28	M 5	8	4.4	19	7	+0.09 0	0.9	3	15					
	8A		-0.014						36				26					-					
	10	10	-0.006 -0.017				12 ~ 60		13	32	M 4	6.5	3.5	23	9.6	0 -0.09	1.15	4	16				
	10A									40				30					-				
	12	12	-0.006 -0.017				10 ~ 150		15	36	15	M 5	8	4.4	26	11.5	0 -0.11	1.15	4	20			
	13									38					27					12.4	22		
	15	15	-0.006 -0.017						10 ~ 150	18		40	15	M 5	8	4.4	30	14.3	0 -0.11	1.15	4	24	
	16											42					31					15.2	25
17	17	-0.007 -0.020	10 ~ 150	20	44			15		M 5		8		4.4	32	16.2	0 -0.11	1.15	4	28			
18					46										34					17	31		
20	20	-0.007 -0.020		10 ~ 150	24	48				15		M 5		8	4.4	36	19	0 -0.21	1.35	5	32		
22						50										39					21	34	
25	25	-0.009 -0.025			10 ~ 150	29						54		15	M 6	9.5	5.4	42	23.9	0 -0.25	1.65	5	38
30												62						49					28.6
35	35	-0.009 -0.025				10 ~ 150	34				62	15			M 8	11	6.5	55	33	0 -0.25	1.9	5	50
40											70							63					38
50	50	-0.009 -0.025					10 ~ 150		44		80		15		M 10	14	9	73	47	0 -0.25	2.2	5	70
54											90							73					47



追加工类型	嵌入部加工	
⑤ 追加工代码	GP	
示例图		
详细说明	在底面部分追加嵌入部加工	
	D	GP g6
	6	8
指定方法	8~30	10
	35~50	12

C1
寸点螺钉 / 销轴