


密封式


陶瓷轴承



★ 产品特点：耐药性轴承，可干式（不润滑）使用。无磁，不受磁铁影响。推荐主要用于蚀刻装置、清洗装置、电镀装置等。防尘效果好



代号	类型	材质			最高使用温度
		轴圈	保持架	球	
BEF	保持架型	ZrO2	PTFE(聚四氟乙烯)	ZrO2	200° C
BEG			PEEK(聚醚醚酮)		
BEH	满球型	无			

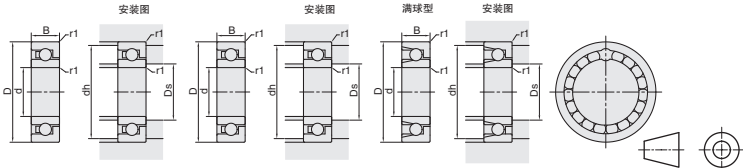

视角标准：第一视角



型号
 BEF-600DDCE
 BEG-630DDCE
 BEH-620DDCE

型号		d	D	B	r1	安装尺寸			重量 g (参考)
代号	公称规格					Ds		dh(max)	
BEF BEG BEH	6800DDCE	10	19	5	0.3	12	12.5	17	4
	6900DDCE		22	6			13	20	7
	6000DDCE		26	8			13.5	24	14
	6200DDCE		30	9				26	25
	6300DDCE	35	11	0.6	14	16.5	31	40	
	6801DDCE	21	5			14.5	19	5	
	6901DDCE	24	6	0.3	16	15	22	8	
	6001DDCE	28	8			16	26	17	
	6201DDCE	32	10	0.6		17	17	28	28
	6301DDCE	37	12				18	32	46
	6802DDCE	24	5	1	17	17.5	22	5	
	6902DDCE	28	7				26	12	
	6002DDCE	32	9	0.3		19	30	24	
	6202DDCE	35	11				19	20	31
	6302DDCE	42	13	1	20	22.5	37	64	
	6803DDCE	26	5	0.3	19	19.5	24	5	
	6903DDCE	30	7				20	28	13
	6003DDCE	35	10	0.6		21	21	33	32
	6203DDCE	40	12				23	36	52
	6303DDCE	47	14	1	25.5	42	87		
	6804DDCE	32	7	0.3	22	22.5	30	13	
	6904DDCE	37	9				24	35	28
	6004DDCE	42	12	0.6		24	26	38	52
	6204DDCE	47	14				1	25	42
	6304DDCE	52	15	1.1	26.5	28	45.5	110	
	6805DDCE	37	7	0.3	27	29	35	16	
	6905DDCE	42	9				40	32	32
	6005DDCE	47	12	0.6		29	30.5	43	61
	6205DDCE	52	15					1	30
	6305DDCE	62	17	1.1	31.5	36	55.5	180	
	6806DDCE	42	7	0.3	32	33	40	18	
	6906DDCE	47	9				34	45	40
	6006DDCE	55	13	0.6		35	37	50	89
	6206DDCE	62	16				1	39	57
	6306DDCE	72	19	1.1	36.5	42.5	65.5	270	
	6807DDCE	47	7	0.3	37	38	45	21	
	6907DDCE	55	10				39	40	51
	6007DDCE	62	14	1		40	42	57	120
	6207DDCE	72	17				41.5	45	65.5
	6307DDCE	80	21	1.1	43	47	72	360	
6808DDCE	52	7	0.3	42	43	50	20		
6908DDCE	62	12	0.6			44	45	58	90
6008DDCE	68	15	1		45	47	63	150	
6208DDCE	80	18	1.1		46.5	51	73.5	280	
6308DDCE	90	23	1.5	48	53	82	490		

▲ 1kgf=9.8N



交货期

4天发货



爱安特自营商城焕新登场，线上下单，疾速送达



400-6699-428



www.ant-fa.com

C2 轴承关节轴承
锁紧螺母