

滚针轴承 冲压外圈

无密封·开式 / 闭式




■无密封·开式 / 闭式



①代号	类型	轴承精度	轴承材质	
			GB	JIS
BLB	开式	GB/T307.1 6级	GCr15	SUJ2
HQ-BLB				
BLC				
HQ-BLC	闭式			

产品特点: 表中极限转速仅适于油润滑

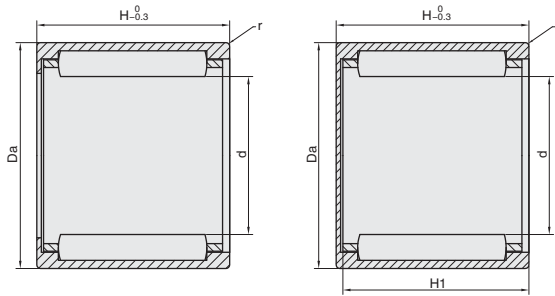

订购编号示例

①代号 ②公称规格
BLB-HKB810

①代号	型号		d	Da	H	H1	r	基本额定负载		疲劳极限载荷 N	极限转速 rpm 油润滑	重量 (g)		
	②公称规格							动载荷 /N	静载荷 /N			HK	BK	
BLB HQ-BLB BLC HQ-BLC	HK0205	-	2	4.6	5	-	0.3	465	265	28.5	58000	0.3	-	
	HK0306	BK0306	3	6.5	6	5.2		1230	840	113	48000	1	1	
	HK0408	BK0408	4	8	8	6.4		1780	1310	144	42500	2	2.1	
	HK0509	BK0509	5	9	9	7.4		2400	1990	239	39000			
	HK0606	-	6	10	6	-		1610	1220	167	36500	1.5	-	
	HK0608	-			8	-		2030	1650	184		2.1	-	
	HK0609	BK0609			9	7.4	2850	2600	310	2.5		2.6		
	HK0709	BK0709	7	11	8	6.4	3100	2950	355	33000	2.6	2.9		
	HK0808	BK0808	8	12			10	8.4	2750		2600	290	29500	2.7
	HK0810	BK0810	9	13	10	8.4	3800	3950	500	26500	3	3.4		
	HK0908	-			8	-	3550	3750	440					
	HK0910	BK0910			10	8.4	4250	4650	600					
	HK0912	BK0912	10	14	12	10.4	5300	6300	860	24300	4.6	4.9		
	HK1010	BK1010			10	8.4	4400	5100	650					
	HK1012	BK1012	12	16	12	10.4	5500	6800	930	20700	4.8	5		
	HK1015	BK1015			15	13.4	6800	8800	1210					
	HK1210	BK1210	13	19	12	9.3	4950	6200	800	20000	4.6	5.2		
	HK1212	BK1212					18	13.3	6500				7300	860
	HK1312	BK1312	14	20	16	13.3	6800	7900	940	17500	10	11		
	HK1412	BK1412					16	13.3	7100				8500	1010
HK1512	BK1512	15	21	16	13.3	7900	9400	1150	16300	11	13			
HK1516	BK1516					10500	14400	1780				16500	15	17
HK1612	BK1612	16	22	12	9.3	7600	9700	1160	15600	12	14			
HK1616	BK1616					10900	15300	1900				15600	16	18
HK1712	-	17	23	16	13.3	7900	10300	1230	14700	12	-			
HK1812	BK1812					8100	10900	1300				14700	13	15
HK1816	BK1816	18	24	16	13.3	11600	17300	2140	14000	18	20			
HK2010	-					6400	8200	1040				14000	12	-
HK2012	-	20	26	12	-	8600	12100	1450	12700	14	-			
HK2016	BK2016					12700	20100	2500				12700	19	22
HK2020	BK2020					15700	26000	3500				12700	24	27

▲ 1kgf=9.8N

▲ 不承诺此产品品牌



交货期
4 工作日



1-49 50-
100% 现询

C2 轴承 / 关节轴承
锁紧螺母