
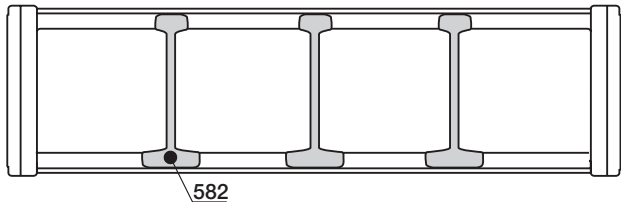


Series R58 classic E2 Tubes

Pitch = 33,3 mm Links per m = 30 Chain length = $s/2 + K$


R	075	100	125	150	200	250
H	200	250	300	350	450	550
D	150	175	200	225	275	325
K	375	475	550	650	825	925

The required clearance height is $H_F = H + 35$ mm (with 0,5 kg/m fill weight). Please consult igus® if space is particularly restricted.

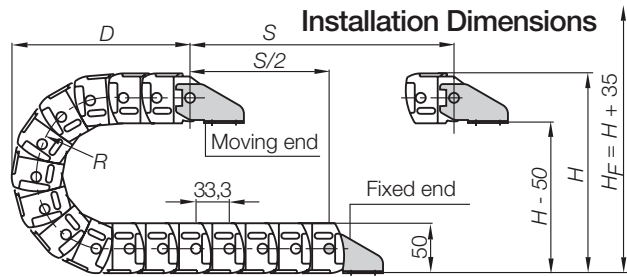


Vertical Separator

unassembled	581
assembled	582




Interior Separation

(the complete range ▶ 6.28)

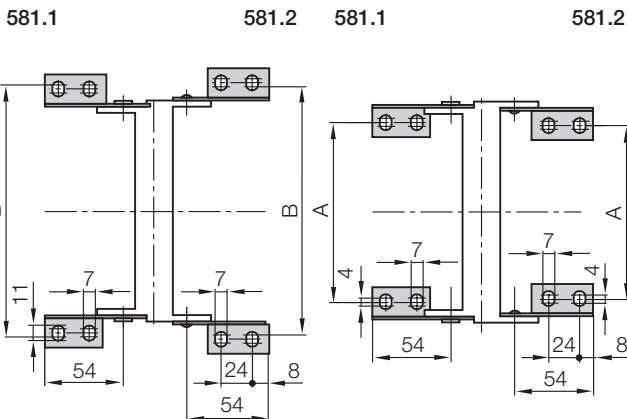

Moving end (with bore)
581.1



581.2
Fixed end (with pin)

Mounting Brackets



Steel, two-piece, pivoting - attachment with socket head cap bolt M6 DIN 912-8.8

For E-Chain®	Part No. full set	Dimension A [mm]	Dimension B [mm]
58.05. ▶	581.12	36,5	84
58.1. ▶	581.12	62	108

The following parts are required for attachment of the mounting brackets:

- Socket head cap bolt M6* DIN 912-8.8 4 pieces/set
- Washer 6,3 DIN 125-ST 8 pieces/set
- Hexagon nut M6 DIN 934-8 4 pieces/set

* The length of the socket head cap bolt is dependent on the thickness of the attachment base.



Full set, for both ends:

581. 12

Single-part order:


581. 1

Mounting bracket with bore

581. 2

Mounting bracket with pin

Additional Features



Interior separation with full-width shelves and shelves



One-piece, steel mounting bracket, pivoting



Steel mounting bracket, flange, pivoting

For more features
▶ see link below



▶ chapter 9